


简体中文 蓝牙解码耳机功率放大器

机器接口介绍

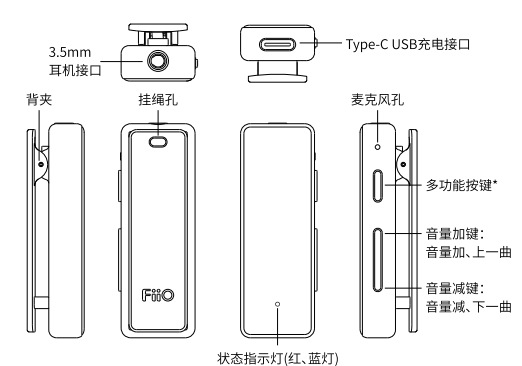

3.5mm 耳机接口 Type-C USB 充电接口

背夹 挂绳孔 麦克风孔 多功能按键*

音量加键: 音量加, 上一曲
音量减键: 音量减, 下一曲

状态指示灯(红、蓝灯)

*多功能按键: 开关机、播放/暂停、回连、强制配对、接听/挂断/拒接电话、打开语音助手

1

简体中文 蓝牙解码耳机功率放大器

功能操作与指示灯显示

开/关机:

关机状态下长按多功能按键约3秒, 蓝灯快闪3次开机。
开机状态下长按多功能按键约5秒, 蓝灯快闪3次关机。

进入配对模式:

1. 未配对过情况下: 开机后自动进入配对状态, 红蓝灯交替快闪。
2. 强制进入配对模式: 开机状态下, 按多功能按键约3s, 红蓝灯交替闪烁。
3. 清除配对: 开机状态下, 同时按住音量加键和音量减键约5秒。
4. 最多支持两台手机同时连接到BTR11。

回连模式:

1. 失去连接后, 蓝灯每三秒快闪2次, 短按多功能按键即可回连。
2. 设备关机再开机后会自动回连上一次连接设备。

连接配对成功后的按键操作:

播放/暂停/通话/挂断/取消呼叫: 短按多功能按键
拒接来电: 有来电时长按多功能按键约2秒
音量加/减: 短按音量加或音量减
音乐换曲: 按住音量加或音量减并保持不放约2秒
打开语音助手: 双击多功能按键

2

简体中文 蓝牙解码耳机功率放大器

其他状态指示灯显示

状态	蓝灯	红灯
1、已连接设备	LDAC编码: 每隔5秒闪3次蓝灯 AAC编码: 每隔5秒闪2次蓝灯 SBC编码: 每隔5秒闪1次蓝灯	熄灭
2、低电提醒	熄灭	每隔5秒亮一次
3、充电中	指示工作状态	常亮(蓝灯亮时红灯灭)
4、充电完成	指示工作状态	熄灭

提示音说明

以下状态将伴有提示音: 开机、关机、连接蓝牙、断开连接、低电提示。

注意事项

- ★请勿将电池置于高温环境中, 电池浸水后禁止使用, 若出现鼓胀, 请勿继续使用。禁止拆解、撞击、挤压、刺破电池或将电池投入火中;
- ★请使用标准的5V充电器对其充电;
- ★请勿将设备置于温度过高或过低(45°C以上0°C以下), 请勿将设备放置在车内等密闭高温环境中;
- ★请勿将设备接触液体溶液, 以防造成设备严重损坏;
- ★当长期没有使用本品时, 需要对产品进行充电, 以保证电池寿命;

3

简体中文 蓝牙解码耳机功率放大器

★请先确认好合适音量后再戴上耳机享受音乐, 以确保您的听力安全;
★请勿拆卸及损伤电池; 请勿将电池投入火中; 电池浸水后禁止使用。

包装清单

- BTR11
- USB短线
- 快速入门
- 售后维修卡

了解更多

- 有关BTR11的相关视频说明和常见问题解答(FAQ), 请扫描BTR11 FAQ二维码。

- 了解更多产品信息, 请访问: www.fio.com



产品名称: 蓝牙解码耳机功率放大器
产品型号: F3083B
额定输入: 5V=1A
尺寸: 约55x19x14.6mm
重量: 约13g
执行标准: GB4943.1-2022
制造厂: 广州飞傲电子科技有限公司
地址: 广州市白云区龙归街夏良龙良路21号

4

环保材料说明

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr, VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	X	0	0	0	0	0
PCBA 焊点	X	0	0	0	0	0
元器件	X	0	0	0	0	0
显示屏*	X	0	0	0	0	0
电池*	X	0	0	0	0	0
外观件	0	0	0	0	0	0
配件*	X	0	0	0	0	0

注: 表中标记“X”的部件, 皆因全球技术发展水平限制而无法实现有害物质的替代, 带*号部件表示如果在您所购买的产品中无该部件, 请忽略表中该部件信息。
0: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572-2011规定的限量要求以下。
X: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572-2011规定的限量要求。

根据中国电子行业标准SJ/T 11364-2014 和相关的中国政府法规, 本产品及其某些内部或外部组件上可能带有环保使用期限标识, 取决于组件和组件制造商, 产品及其组件上的使用期限标识可能有所不同, 组件上的使用期限标识优先于产品上任何与之相冲突的或不用的环保使用期限标识。


此环保使用期限只适用于产品在规定的条件下工作

由于产品不断改进, 各项规格及设计随时更改, 恕不另行通知。

5

English Bluetooth DAC and Headphone Amplifier

Buttons and ports labeled

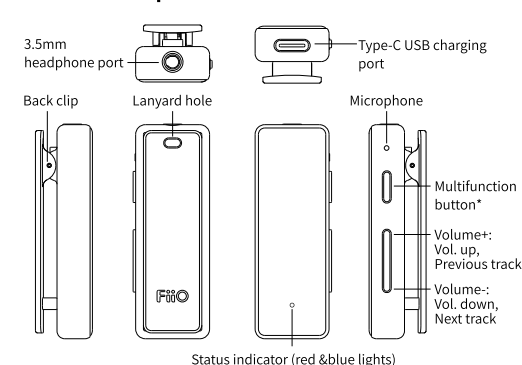

3.5mm headphone port Type-C USB charging port

Back clip Lanyard hole Microphone Multifunction button*

Volume+: Vol. up, Previous track
Volume-: Vol. down, Next track

Status indicator (red & blue lights)

*Multifunction button: Power on/off, Play/Pause, Reconnect, Force a pairing, Answer/Hang up/Reject a call, Activate voice assistant

6

English Bluetooth DAC and Headphone Amplifier

Operation explained and display of indicator light

Power on/off:

If the device is off, hold the multifunction button for about 3 seconds until the blue light flashes quickly three times to turn on the device.
If the device is on, hold the multifunction button for about 5 seconds until the blue light flashes quickly three times to turn off the device.

Enter pairing mode:

1. Never been connected before: The device will automatically enter the pairing mode once being turned on with the red and blue lights quickly flashing alternately.
2. Force the device to enter pairing mode: When the device is on, hold the multifunction button for about 3 seconds until the red and blue lights flash alternately.
3. Clear pairing: When the device is on, hold the volume+ and volume- buttons simultaneously for about 5 seconds.
4. The BTR11 only supports connecting with two devices at the same time.

7

English Bluetooth DAC and Headphone Amplifier

Enter reconnecting mode:

1. After losing connection, the blue light will flash quickly twice every three seconds. Short press the multifunction button for reconnecting.
2. After the device restarted, it will automatically reconnect to the last connected device.

Button operation after a successful connection:

Play/Pause, Answer/Hang up/Cancel a call: Short press the multifunction button
Reject a call: Hold the multifunction button for about 2 seconds when there is an incoming call
Volume up/down: Short press the volume+/- button
Switch songs: Hold the volume+/- button for about 2 seconds
Activate voice assistant: Double press the multifunction button

8

English Bluetooth DAC and Headphone Amplifier

Other indicator light display

Status	Blue light	Red light
1. Device connected	LDAC: flashes 3 times every 5 seconds AAC: flashes twice every 5 seconds SBC: flashes once every 5 seconds	Off
2. Low battery alert	Off	Lights up every 5 seconds
3. Charging	Indicates working state	Always on (goes off when the blue light is on)
4. Fully charged	Indicates working state	Off

Notification sounds

The following states will be accompanied by a notification sound: power on, power off, Bluetooth connecting, disconnected, low battery alert.

9

English Bluetooth DAC and Headphone Amplifier

Notes and precautions

- ★Please do not expose the battery to high temperatures; do not use the battery if it is soaked in water or severely swollen; do not disassemble, bump, squeeze and puncture the battery, or drop it into fire.
- ★It is recommended to charge the device with a standard 5V charger.
- ★Please do not place the device in circumstances of excessive high/low temperatures (above 45°C or below 0°C), or in an enclosed high-temperature environment, such as in a car.
- ★Please keep the device away from liquids to avoid any damage to it.
- ★If the device is to be left unused for a long time, please recharge it periodically to preserve its battery life.
- ★Please adjust the volume to a suitable level before putting on headphones, so as to protect your hearing.

List of items included


- BTR11
- USB short cable
- Quick start guide
- Warranty card

10

English Bluetooth DAC and Headphone Amplifier

To learn more

- For related video instructions of the BTR11 and FAQ (Frequently Asked Questions), please scan the QR code below.
- To learn more about the product, please visit our website: www.fio.com



Due to continuous improvement, every specification and design is subject to change at any time without further notice.

Hereby, Guangzhou FIO Electronics Technology Co., Ltd declares that this device is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at: www.fio.com/doc

Function	Frequency	Maximum output power
Bluetooth	2402-2480MHz	7.1dBm

11

English Bluetooth DAC and Headphone Amplifier

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries:
This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate collection point.

FCC NOTICE:
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

12