
机器接口介绍（图片仅供参考，具体以实物为准）



开/关机

M25关机状态长按电源/锁屏键开机，首次开机时，选择相应语言，点击完成进入主界面；开机状态下长按电源/锁屏键出现关机提示框，可选择关机或重启。

Type-C接口

M25底部有2个USB Type-C端口，标识USB3.0的端口，支持数据传输/充电、USB DAC解码、USB OTG等功能；标识POWER IN的端口，仅支持充电/供电功能，不能连接电脑传输数据。

充电

USB3.0支持QC和PD协议快充；POWER IN支持电荷泵快充，仅支持PD协议。
为达到设计的充电时间，推荐选用支持PPS协议的PD充电器接POWER IN端口充电。

台机模式 (D.MODE) 开关功能

USB端口连接适配器后：
推钮往上拨，台机模式开启，此时电池将不充电。
推钮往下拨，台机模式关闭，此时电池可正常充电。

大耳模式

当检测到快充适配器插入时，增益设置项下会新增“大耳模式”选项。若开启台机模式，系统会弹窗提示是否需要启用大耳模式，请根据您的需求来选择是否启用。

HOLD开关功能

HOLD开关启用后，可锁定M25机身按键和显示屏的操作响应，防止误触。您可以在设置-通用菜单下选择需要锁定操作的按键，或者通过取消HOLD锁定来恢复按键功能。

手势操作

返回上一级：从屏幕左侧边缘向右滑动或屏幕右侧边缘向左滑动
返回桌面：从屏幕下方上滑
多任务管理：从屏幕下方上滑并停留

工作模式切换

M25拥有5种工作模式，分别为安卓模式、纯音模式、USB DAC模式、蓝牙接收模式、AirPlay模式，首次开机将默认为安卓模式，您可以在下拉菜单，或设置菜单中点击工作模式来切换不同的工作模式。

● 安卓模式/纯音模式：
安卓模式/纯音模式下可连接电脑与M25传输数据。
注：MAC系统的MTP驱动可通过下载地址：
https://www.fiio.com/Driver_Download进行下载。

● USB解码模式：
首次使用USB解码模式前，您需要前往官网下载USB DAC驱动，并按照相应教程安装驱动后方可使用USB解码功能。

● 蓝牙接收模式：
首次切换到蓝牙接收模式时，M25将自动进入配对状态，后续再次进入蓝牙接收模式时将自动回连上一次连接设备。

● AirPlay模式：
AirPlay模式工作时，M25需要接入WiFi网络，进入AirPlay前请确认M25已连接正常可用的网络。

固件升级

● OTA在线升级
打开WiFi并连接到可用网络即可自动检测是否有新版本固件更新，若未检测到新版本，可尝试前往“技术支持-固件升级-在线升级”，点击“检查更新”进行手动检测更新。

● 本地升级
请前往官网下载升级固件，并按相应教程进行版本升级。
下载地址：https://www.fiio.com/supports

注意事项

★请勿将电池置于高温环境中，电池浸水后禁止使用，若出现鼓胀，请勿继续使用，禁止拆解、撞击、挤压、刺破电池或将电池投入火中。
★请勿将设备置于温度过高或过低（45°C以上0°C以下），请勿将设备放置在车内等密闭高温环境中。
★不可自行维修、拆卸和将产品放在有水的地方。
★当长期没有使用本产品时，需要定期给产品充电，以保证电池寿命。
★当您在使用耳机时，会因此听不清外界环境声音，为了您的安全，请避免在危险环境中使用耳机。
★搭配电压过高的充电器充电可能会损坏机器，请选择推荐使用的充电器进行充电。
★系统发生故障导致死机时，可尝试长按“电源/锁屏键”10秒以上，强制重启机器。
★如果用错误型号的电池组替换会有着火或爆炸的危险。

包装清单（请核对包装内是否包括以下物品）

- M25主机
- 镜片保护膜（出厂贴在主机上）
- 主机保护套
- USB数据线
- 售后维修卡
- 快速入门

了解更多

- 有关M25的相关视频说明和常见问题解答（FAQ），请扫描M25 FAQ二维码。
- 了解产品详细使用说明请访问https://www.fiio.com/supports下载相关文件查阅。
- 了解产品更多信息请访问：www.fiio.com
- 在M25的“设置-系统-法律信息”中，可以查看产品的CMIIT-ID

产品名称：便携高清无损音乐播放器
产品型号：FIO02M
额定输入：5V⎓3A
尺寸：约139.8x76x18mm
重量：约318g
执行标准：Q/FADZ 1-2017
制造厂：广州飞图电子科技有限公司
地址：广州市白云区龙归街夏良龙良路21号

由于产品不断改进，各项规格及设计随时更改，恕不另行通知。

环保材料说明

产品中有害物质的名称及含量


部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr,VI)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB	×	○	○	○	○	○
PCBA 焊点	×	○	○	○	○	○
元器件	×	○	○	○	○	○
显示屏*	×	○	○	○	○	○
电池*	×	○	○	○	○	○
外观件	○	○	○	○	○	○
配件*	×	○	○	○	○	○

注：表中标记“×”的部件，至少全球技术发展水平限制而无法实现有害物质的替代。带*号部件表示如果在您所购买的产品中无该部件，请忽略表中该部件信息。
○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572-2011规定的限量要求以下。
×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572-2011规定的限量要求。

根据中国电子行业标准SJ/T 11364-2014 和相关的中国政府法规，本产品及其某些内部或外部组件上可能带有环保使用期限标识。取决于组件和组件制造商，产品及其组件上的使用期限标识可能有所不同。组件上的使用期限标识优先于产品上任何与之相冲突的或不同的环保使用期限标识。

此环保使用期限只适用于产品在规定的条件下工作

Buttons and Ports Labeled (Pictures are for reference only. The actual product may vary)

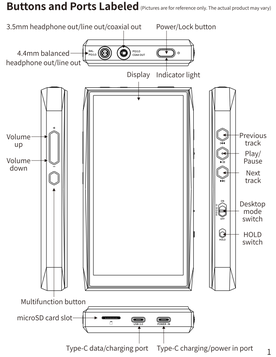

Power on/off

When the M25 is off, hold the Power/Lock button to turn on the M25. On its first startup, tap the preferred language onscreen to enter the main UI. Hold the Power/Lock button while the M25 is on, and a shutdown dialogue will pop up. You can select to turn off or reboot the player.

Type-C port

The bottom of the M25 has two USB Type-C ports. The one marked USB3.0 supports data transfer, charging, USB DAC, USB OTG and so on. The other that marked POWER IN only supports charging/power supply but not data transfer with computers.

Charging

The USB3.0 port supports QC and PD fast charging; the POWER IN port only supports PD fast charging.
To achieve the designed charging time, it is recommended to use a PD charger that supports the PPS protocol when charging via the POWER IN port.

Desktop mode switch (D.MODE)

After connecting an adapter to the USB port:
Push the switch upward to enable Desktop Mode, and the battery will not be charged.
Push the switch downward to disable Desktop Mode, and the battery will be charged normally.

Super High Gain mode

When a fast-charging power adapter is inserted in the M25 and is detected, the "Super High Gain mode" will show up on the GAIN settings menu. Meanwhile, if the D.MODE is enabled, a dialogue prompt of "Switch to Super High Gain mode?" will pop up, and you can decide whether to enable or not based on your needs.

HOLD switch

When the HOLD switch is enabled, it locks the operation responses of the M25's buttons and display screen to prevent accidental touches. You can go to Settings -> General menu to select which buttons you want to lock, or restore full button functionality by turning off the HOLD switch.

Gesture operation

Return to previous menu: Swipe right from the left edge of the screen, or swipe left from the right edge.
Return to homepage: Swipe up from the bottom edge of the screen.
Multitask managing: Swipe up from the bottom edge of the screen and then hold.

Working modes switch

The M25 has five working modes: Android mode, Pure Music mode, USB DAC mode, Bluetooth Receiving mode, and AirPlay mode. The M25 will default to enter Android mode when it powers on for the first time. You can switch to other working modes on the drop-down or Settings menu.

● Android mode/Pure Music mode
Under the Android mode/Pure Music mode, the M25 can be connected to a computer for data transmission.
Note: The MTP driver for MAC can be downloaded at
https://www.fiio.com/Driver_Download

● USB DAC mode
When switching to the USB DAC mode for the first time, please download the USB DAC driver on our website and follow relevant instructions to install it before using the USB DAC function.

● Bluetooth Receiving mode
When switching to the Bluetooth Receiving mode for the first time, the M25 will automatically enter the pairing state. The next time it enters Bluetooth Receiving mode, it will reconnect to the last connected device automatically.

● AirPlay mode
When working in AirPlay mode, the M25 requires a valid WiFi connection. Please confirm that it is connected to an available network before entering the AirPlay mode.

Firmware Upgrade

● OTA (Over-the-Air) online upgrade
Turn on the WiFi function on the M25 and connect it to an available network. It will automatically detect if there is a new firmware. If no firmware is detected, please go to "Technical Support -> Firmware Update -> Online Upgrade" to check and upgrade the firmware manually.

● Local upgrade
Please download the firmware on our website and follow relevant instructions to upgrade it.
Download link: http://www.fiio.com/supports

Notes and Precautions

★Please do not put the battery in a high-temperature environment. The battery is prohibited from use if it is soaked in water, or if it gets swollen. Please do not disassemble, hit, crush, or puncture the battery, and do not put it on fire.
★Please do not place the device in circumstances of excessively high/low temperatures (above 45°C or below 0°C), or in an enclosed high-temperature environment, such as in a car.
★Please do not repair or disassemble the product on your own and do not put it in water.
★Please charge the battery on a regular basis to secure the battery life if this product has not been used for a long time.
★You might not be able to hear the sound of the surroundings when using headphones. For your safety, please avoid using headphones in dangerous situations.

★It is recommended to use a suitable charger in case of a high-voltage adapter causing damage to the device.
★In the likely event that the M25 hangs up, you may hold the Power/Lock button for over 10 seconds to force a reboot.
★Replacing with an incorrect battery pack may cause a fire or explosion.

List of Items Included

(Please check if the following items are included)

- M25
- Screen protector (applied on the M25 in factory)
- Protective case
- USB data cable
- Warranty card
- Quick start guide

To Learn More

- For related video instructions of the M25 and FAQ (Frequently Asked Questions), please scan the QR code below.
- To learn more about the product, please visit our website: www.fiio.com.
- To learn detailed instructions about the product, please visit https://www.fiio.com/supports to download relevant files.
- To check the FCC ID: R56-FC1001 of the M25, please go to the menu of Settings -> System -> Legal information.

Due to continuous improvement, every specification and design is subject to change at any time without further notice.

WEEE Directive & Product Disposal

At the end of its serviceable life, this product should not be handed as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment, or returned to the supplier for disposal.

Internal/Supplied Batteries:
This symbol on the battery indicates that the battery is to be collected separately. This battery is designed for separate collection at an appropriate collection point.

Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries.

Hereby, Guangzhou FIIO Electronics Technology Co., Ltd. declares that this device is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at: www.fiio.com/doc

Function	Frequency	Maximum output power
Bluetooth	2402-2480MHz	6dBm
WiFi	2412-2472MHz	12.5dBm
	5180-5320MHz	13dBm
	5500-5825MHz	12dBm

For this radio device, the following restrictions on putting into service or of requirements for authorisation of use apply in BE, BG, CZ, DK, DE, EE, IE, EL, ES, FR, HR, IT, CY, LV, LT, LU, HU, MT, NL, AT, PL, PT, RO, SI, SK, FI, SE, UK, IS, LI, NO, CH,TR: 5150-5350 MHz band is restricted to indoor operations only.

FCC NOTICE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
•Reorient or relocate the receiving antenna.
•Increase the separation between the equipment and receiver.
•Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
•Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.